


Otterteck® Underdecking Installation Instructions

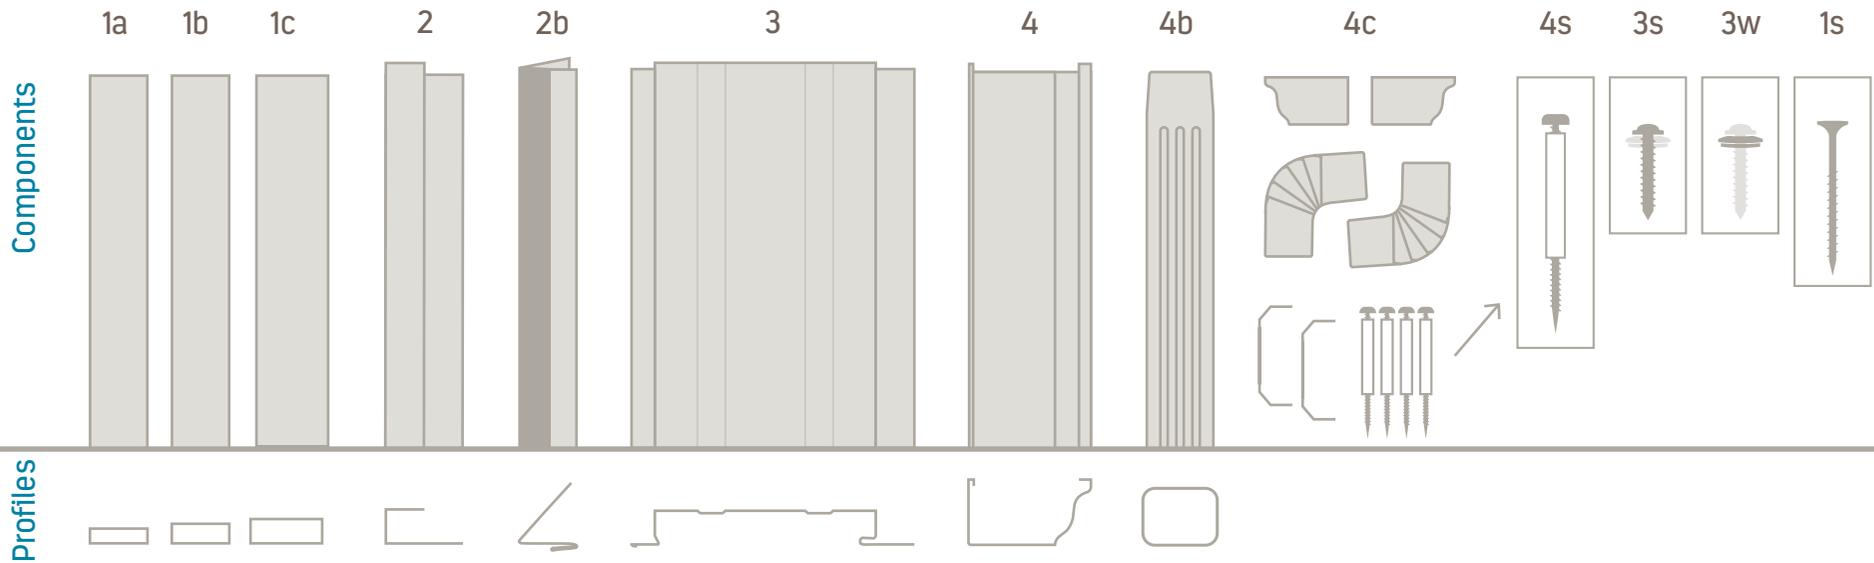

1. Poly Pitching Rails

- 1a. ½" x 2 ¾" x 8'
- 1b. ¾" x 2 ¾" x 8'
- 1c. 1" x 3 ½" x 8'

2. J-Channel 2b. End Strip

3. 12" Underdeck Panel

4. Boundary Gutter

- 4b. Downspout
- 4c. Gutter and downspout accessories:
 - Gutter endcaps
 - Downspout elbows
 - Downspout clips
 - Gutter screws

Fasteners

- 4s. Gutter screws
- 3s. Stainless steel screws
- 3w. Washers
- 1s. Pitching rail screws




Installation Steps

- 1 Ensure that your existing deck-to-house connection is properly flashed so any water that runs between deck and house will drain out onto underdecking panels.
- 2 Install Poly Pitching Rails (1a., 1b., 1c.) as needed based on slope requirements. 1 ¼" of slope in 12' is recommended. See illustration on reverse side of this page. If your deck itself is already sloped at least 1 ¼" in 12', you only need to use ¾" x 2 ¾" (1b.) pitching rails. Poly Pitching Rails should be installed perpendicular to deck floor joists every 28 ½" starting from the house and moving toward the gutter placement end of deck. Use pitching rail screws (1s.) to fasten to deck joists.
- 3 Install J-channel (2.) around perimeter except for where gutter will be mounted. Ensure proper amount and direction of overlap when a splice in the J-channel is required. It is recommended to use a bead of silicone on J-channel splices to prevent any leaking. Use stainless steel screws and washers (3s. and 3w.) to install J-channel and do not mount directly against pressure treated wood.
- 4 Install 12" Otterteck® underdecking panels (3.) starting at one side with short flange side of panel in J-channel. Use stainless steel screws and washers (3s. and 3w.) to fasten wide flange edge of panels to pitching rails and continue by interlocking next panel into first and proceeding in such manner to other side of deck. Panel length should be 1 ½" shorter than it measures from house to beam where gutter will be mounted. Never install panels in direct contact with pressure treated wood.
- 5 If necessary to customize the width of the last panel (3.), measure to the inside of the J-channel and subtract 3/16". Score the panel with a utility knife and bend to break off the excess. Snap the end strip (2b.) onto the cut edge and seal with a bead of caulk. Push the assembly into the J-channel, starting at one end and working your way to the other.
- 6 Install gutter (4.) with 7" gutter screws with ferrules (4s.) Keep gutter ¼" below underdecking panel and slope slightly toward the end on which you wish to install downspout. Gutter should not be installed in direct contact with pressure treated wood.
- 7 Install downspout (4b.) into desired position in gutter and use mounting clips to fasten to porch post or other surface. Use end caps and elbows (4c.) as required to finish downspout appropriately. Make sure to drain toward outside of patio and consider installing PVC pipe to carry drain water away from foundations to prevent erosion.


Please feel free to visit otterteck.com/installation for more detailed instructions and illustrations of the process.

Enjoy your Otterteck outdoor space!

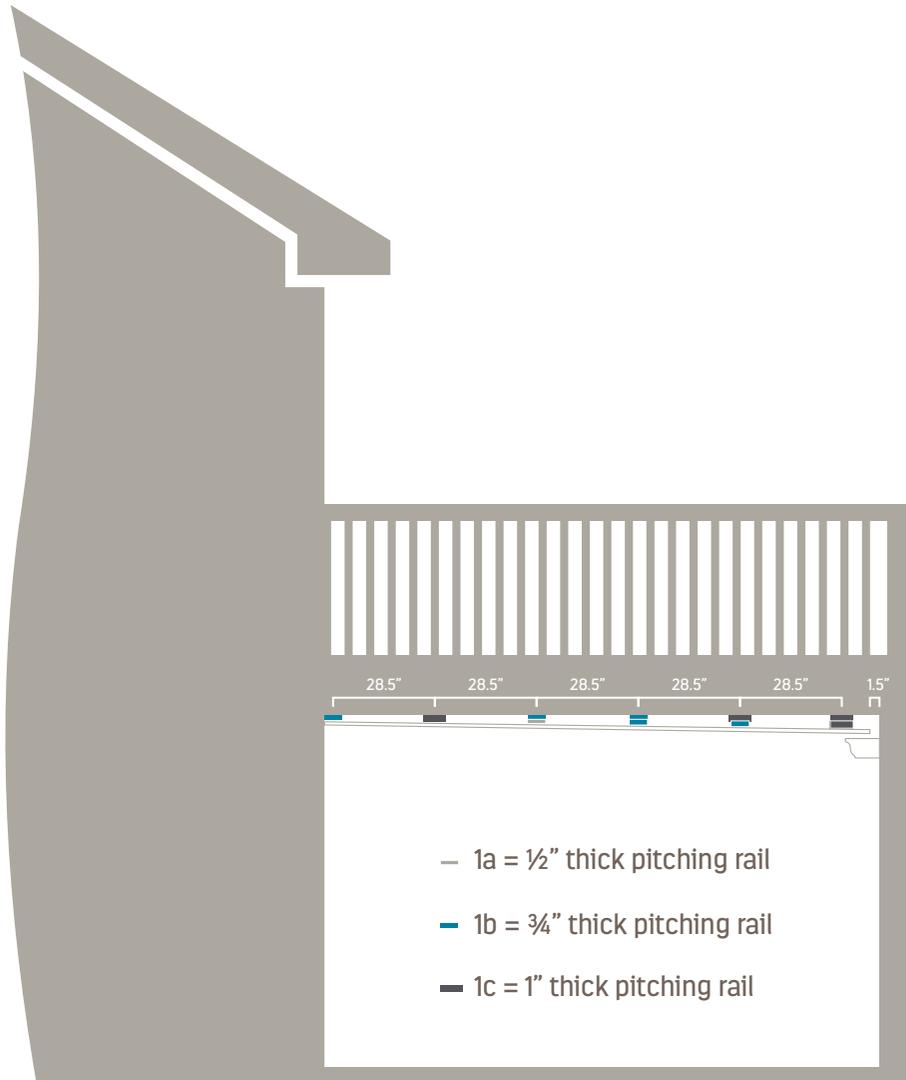

Scenario 1

If your existing deck is level, use a combination of the 3 pitching rail thicknesses to create slope from the house side of deck toward the gutter side. Use the illustration above as a guide.

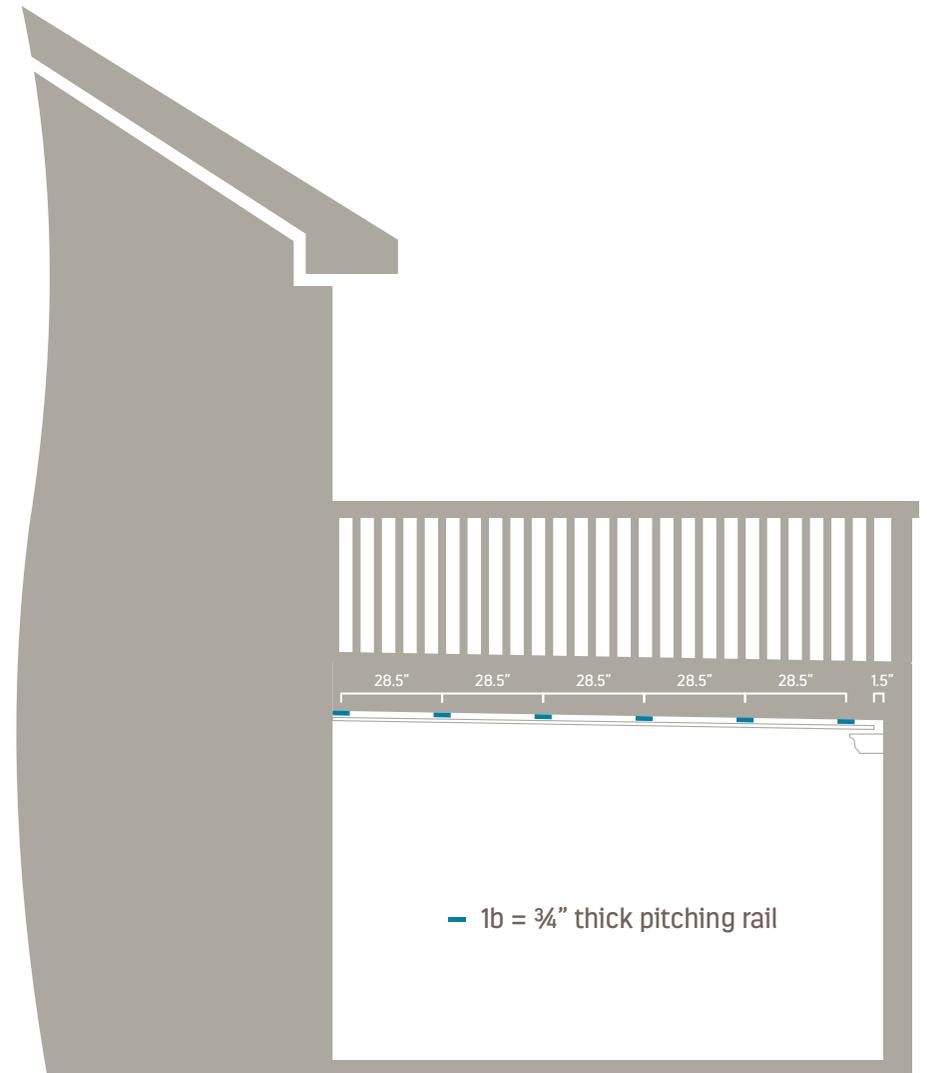

Scenario 2

If your existing deck is already sloped, you do not need to add slope with the pitching rails. In this case simply use the 3/4" pitching rails (**1b**). Use the illustration above as a guide.